

SPECIFICATIONS (GB-50)

1. 4" inlet/outlets Sch. 40. (No-Hub)
2. Max flow rate: 50 GPM
3. Liquid capacity: 52 Gallons
4. Max grease capacity: 249 lbs. (35 Gallons)
5. Max solids/sediment capacity: 6 Gallons
6. Unit weight w/std. covers: 90 lbs.
7. 2,000 lb. load rated, bolted, gas/water tight composite covers.
8. Maximum operating temperature 190 °F continuous.

OPTIONS


- ☐ Teleglide short adjustable riser (Qty. = _____)
- ☐ Teleglide long adjustable riser (Qty. = _____)
- ☐ Male pipe thread connections
- ☐ 3" inlet/outlet connections
- ☐ High water table 304 stainless anchor kit
- ☐ Highway rated bolted composite cover
- ☐ Highway rated pickable composite cover
- ☐ Clamping collar kit

Signature of Approval: _____


Company: _____

Date of Approval: _____


TeleGlide Riser Order Guide		
Riser Range	GB-50	
	SR24	LR24
0"-3 1/2"	0	0
>3 1/2"-22"	1	0
>22"-37"	0	1

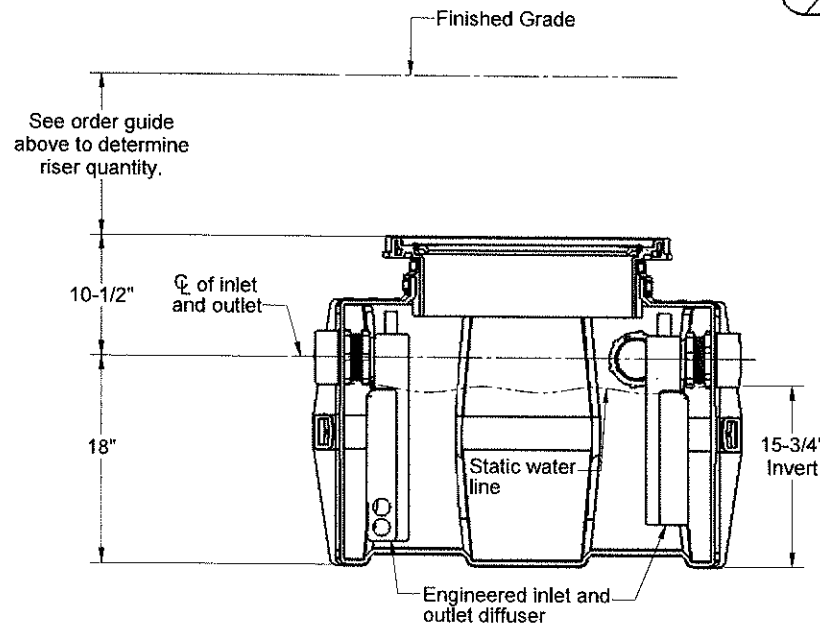

SECTION "A-A"

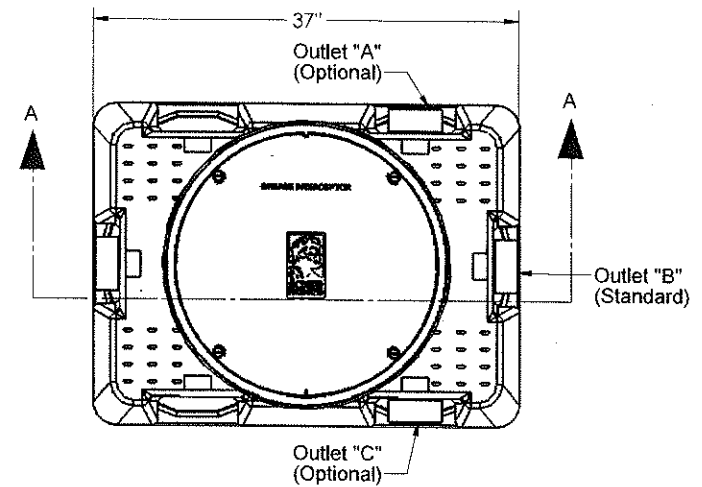

TOP VIEW

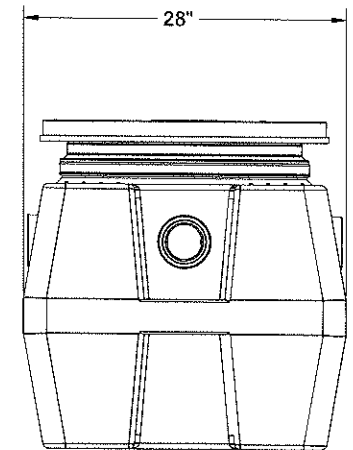

END VIEW



PART NUMBER: GB-50

DESCRIPTION:

GREAT BASIN SERIES POLYETHYLENE
GREASE INTERCEPTOR 50 GPM, 52 LIQUID
GALLONS, 249 GREASE POUNDS CAPACITY

Schier Products
9500 Woodend Road
Edwardsville, KS 66111
Tel: 800-827-7119
Fax: 800-827-9664
www.schierproducts.com

Made in the U.S.A

SUBMITTAL SHEET



grease
interceptors



oil
separators



solids
interceptors



chemical
waste tanks



process
systems

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SCHIER PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SCHIER PRODUCTS IS PROHIBITED.

DWG BY: TEU DATE: 12/8/10 REV: 3 - 2/21/12 MATL: PE



**SCHIER
PRODUCTS**
Pioneering Drain Line Purity